




cod.	Ø	pz/pcs	C	ØG	sp	R	bullone	cusc	binario	portata	CodTek
405.80	80 Tub. 40	6	33	Ø59	24	10,3	M14x70	2	902-904.20	350 kg.	ARU040508ZB
405.90	90 Tub. 40	6	33	Ø71	24	10,3	M14x70	2	902-904.20	380 kg.	ARU040509ZB
405.100x40	100 Tub. 40	6	33	Ø77	28	10,3	M14x70	2	902-904.20	410 kg.	ARU040506ZB
405.100x50	100 Tub. 50	6	43	Ø77	28	10,3	M14x70	2	902-904.20	410 kg.	ARU040501ZB
405.120x40	120 Tub. 40	6	33	Ø97	28	10,3	M14x70	2	902-904.20	430 kg.	ARU040507ZB
405.120x50	120 Tub. 50	6	43	Ø97	28	10,3	M14x70	2	902-904.20	430 kg.	ARU040502ZB
405.140	140 Tub. 50	4	43	Ø117	32	10,3	M16x70	2	902-904.20	550 kg.	ARU040503ZB
405.160	160 Tub. 50	2	43	Ø137	32	10,3	M16x70	2	902-904.20	570 kg.	ARU040504ZB
405.200	200 Tub. 50	2	43	Ø177	32	10,3	M16x70	2	902-904.20	600 kg.	ARU040505ZB



Sliding gates accessories

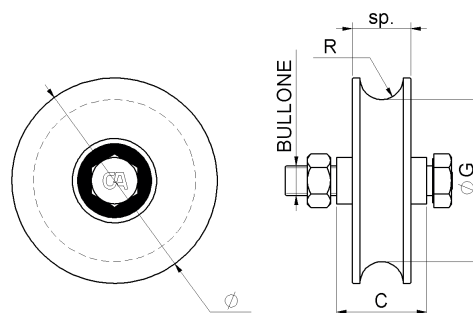

Galvanized steel components



- Components to fix
- Adequately strengthen the areas anchoring the door and/or structure / frame.



Check the product every 6/12 months.
In case of anomalies, prevent the usage of the hinge and the installed product must be checked by professional personnel.



Responsibly dispose of the product and of its packaging respecting the local legislations of the Country of installation.

The company reserves the right to make technical as well as aesthetic changes without previous notice.

All responsibility due to an inappropriate use of the product is declined.

All drawings, photos, trademarks, logos, are of exclusive Combi Arialdo's property. All uses not expressly authorized by the company will be prosecuted.

