

cod.	mm.	pz/pcs	A	B	C	ØD	E	F	CH	CodTek	N m (α° 90)	N m (α° 180)	N m (α° 270)	N m (α° 360)
1222.DX	Ø22x25x150	12	149	71	7	22	28	25	6	ACE-122202GR	4	8	12	16
1222.SX	Ø22x25x150	12	149	71	7	22	28	25	6	ACE-122201GR	4	8	12	16



Hinges



Steel components



The hinge has only a function of self-closing door; it must be used jointed to hinges suitable to the door's weight.



- Components to weld
- The weld must be adequately sized to support the applied forces and with suitable electrode material.
- Adequately strengthen the areas anchoring the door and/or structure / frame.



- To ensure proper functionality over time, perform adequate lubrication at the time of installation and subsequently every 25.000 cycles using an appropriate technical product.

- Check the product every 6 months..

In case of anomalies, prevent the usage of the hinge and the installed product must be checked by professional personnel.








Responsibly dispose of the product and of its packaging respecting the local legislations of the Country of installation.

The company reserves the right to make technical as well as aesthetic changes without previous notice.

All responsibility due to an inappropriate use of the product is declined.

All drawings, photos, trademarks, logos, are of exclusive Combi Arialdo's property. All uses not expressly authorized by the company will be prosecuted.

1222SX

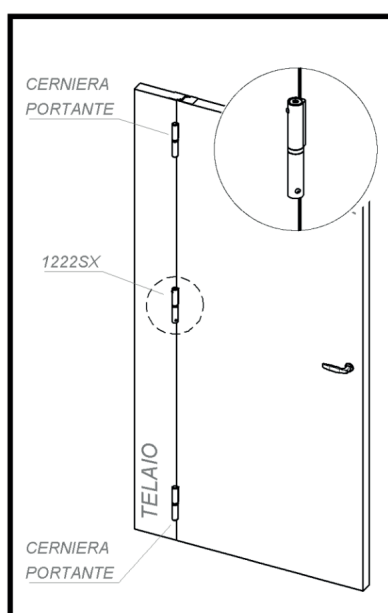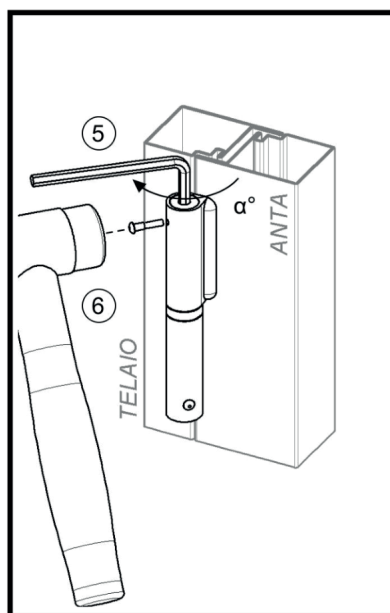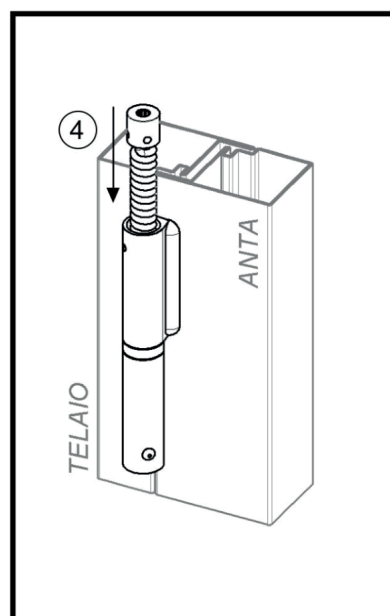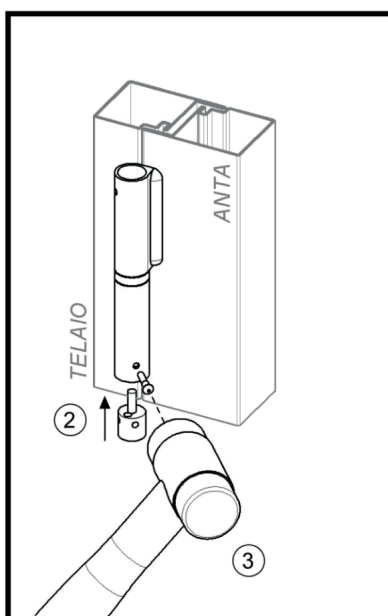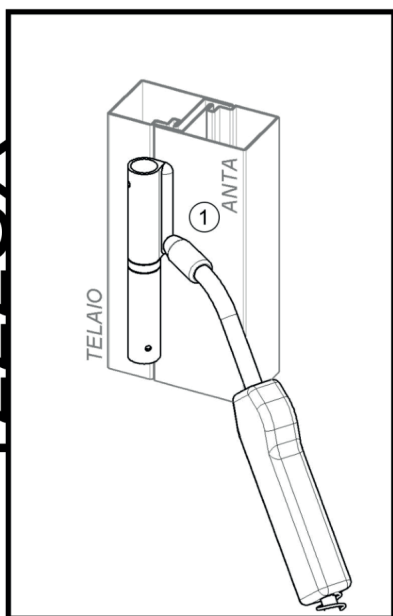

1222DX

