

cod.	mm.	pz/pcs	A	B	C	D	E	F	G
1462PL.M	MEDIA	2	55 MIN.	155 MAX.	200	73	110	160	100
1462PL.G	GRANDE	2	50 MIN.	200 MAX.	250	74	151	250	170

cod.	H	4 asole	2 asole	sp	I	L	N	olive	staffa di fissaggio
1462PL.M	25	11x46	13x43	3	40	205	150	Ø40x45	466.40
1462PL.G	22	11x54	13x53	4	90	300	250	Ø40x60	466.90

cod.	CodTek
1462PL.M	AAC146201ZB
1462PL.G	AAC146202ZB



Sliding gates accessories



Galvanized steel/nylon components



- Components to weld and to fix.
- The weld must be adequately sized to support the applied forces and with suitable electrode material.
- Adequately strengthen the areas anchoring the door and/or structure / frame.



Check the product every 6/12 months.
In case of anomalies, prevent the usage of the hinge and the installed product must be checked by professional personnel.




Responsibly dispose of the product and of its packaging respecting the local legislations of the Country of installation.

The company reserves the right to make technical as well as aesthetic changes without previous notice.


All responsibility due to an inappropriate use of the product is declined.

All drawings, photos, trademarks, logos, are of exclusive Combi Arialdo's property. All uses not expressly authorized by the company will be prosecuted.


1A

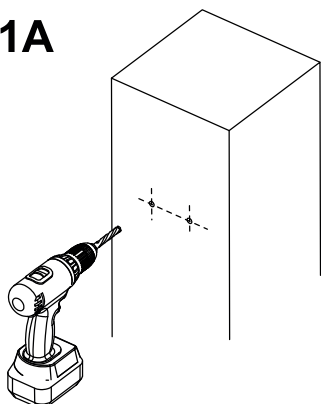


2A

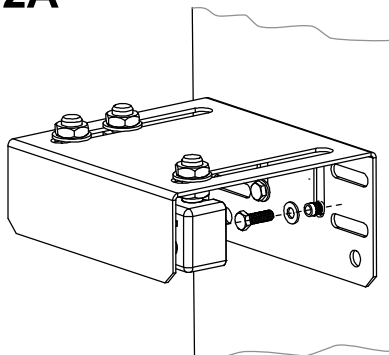


3A

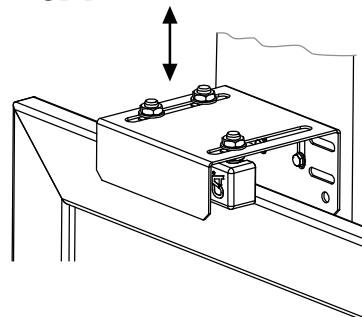


4A

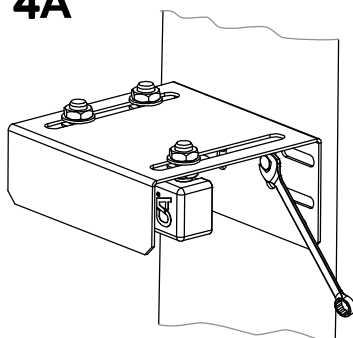


5A

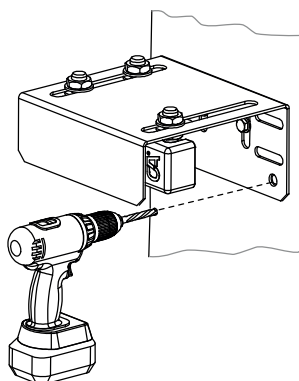

6A

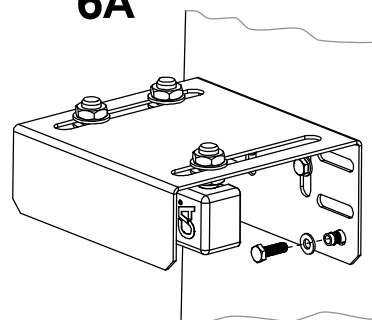


7A



A FISSARE - TO FIX

B

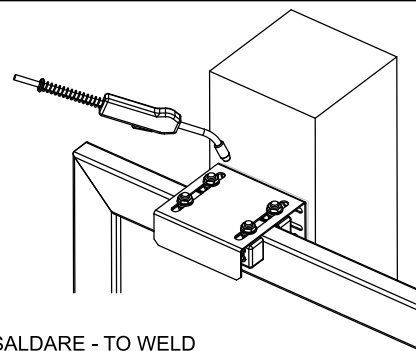

A SILDARE - TO WELD

